


There are seven different pedal angle position, each with 3.75° increment. They covering the total range of 22.5°, from -15° to +7,5°. The angle adjustment procedure is the same for all three pedal. Usually the pedal angle depends on driver's sitting height. The higher the sitting position, the pedal is in more backward position.

MAXIMUM BACKWARD POSITION

MAXIMUM FORWARD POSITION

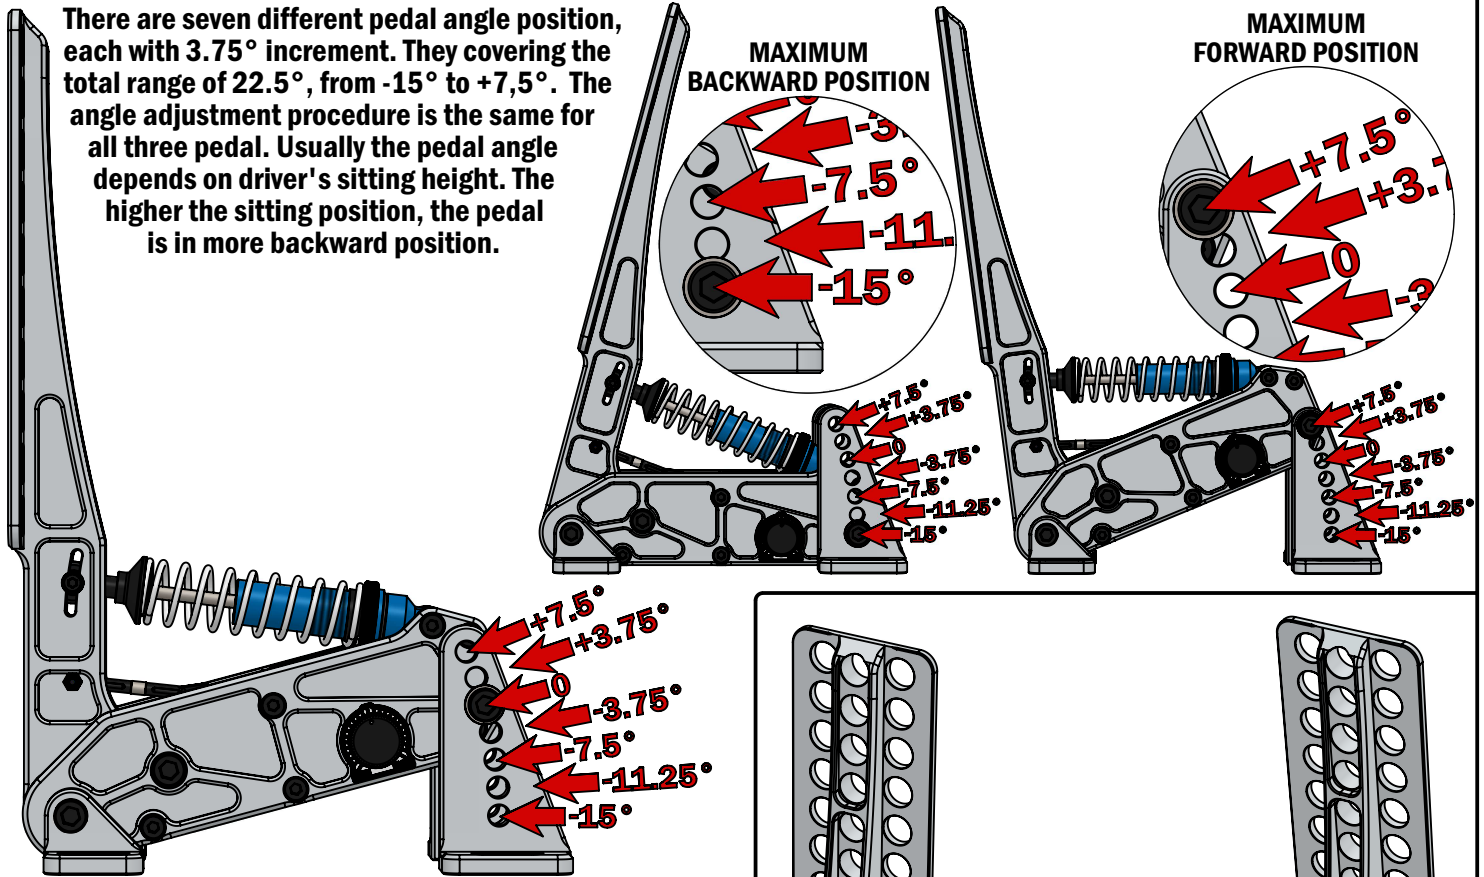

Use 5mm Hex wrench for this step
We recommend to adjust pedal angle after mounting it the to the baseplate.

**STEP 3
ADJUST THE PEDAL
TO THE DESIRED
POSITION.**

**STEP 1
LOOSEN BOTH
SIDE SCREWS.**

**STEP 4
ADD SIDE
WASHER AND
SCREW THEN
TIGHTEN BOTH
SCREWS.**

**STEP 2
REMOVE BOTH
SCREW AND WASHER.**

**STEP 5
TIGHTEN BOTH
SIDE SCREWS.**

