

PLACE OR REMOVE GAP ADJUSTING WASHER HERE IF YOU WANT.

**STEP 5**  
RE-ATTACH THE DESIRED BRAKE STACK.



**STEP 4**  
REMOVE THE BRAKE STACK.



YOU CAN KEEP THE SPRING ON IT'S PLACE.





**STEP 7**  
ADD TWO SCREWS WHILE PRESSING THE PEDAL A LITTLE BIT BACKWARDS.



**STEP 6**  
FOLD BACK THE PEDAL ARM TO THIS POSITION.



ENOUGH WHEN YOU HAND TIGHTEN THEM. USE 6mm SOCKET DRIVE TO TIGHTEN THEM MORE.

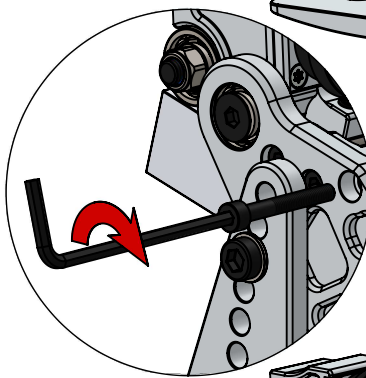

**STEP 8**  
RE-ATTACH AND TIGHTEN THE SCREW.

